


PERFORMANCE			ROTOR SPRAY™		VARI-ROTOR SPRAY™		INVERTED ROTOR SPRAY™	
			TESTED 0.2 m ABOVE GROUND		TESTED 0.2 m ABOVE GROUND		TESTED 0.8 m ABOVE GROUND	TESTED 2.0 m ABOVE GROUND
			DIAMETER OF THROW (m)	STREAM HEIGHT (m)	DIAMETER OF THROW (m)	STREAM HEIGHT (m)	DIAMETER OF THROW (m)	DIAMETER OF THROW (m)
BASE COLOUR AND ORIFICE SIZE	PRESS. (kPa)	FLOW (lph)	DIAMETER OF THROW (m)	STREAM HEIGHT (m)	DIAMETER OF THROW (m)	STREAM HEIGHT (m)	DIAMETER OF THROW (m)	DIAMETER OF THROW (m)
BROWN 0.9 mm	100	31	5.2	0.2			4.0	5.4
	125	35	5.6	0.3			4.2	5.8
	150	38	5.6	0.4			4.2	6.0
BLUE 1.0 mm	100	38	5.2	0.3			4.2	5.6
	125	42	5.4	0.4			4.4	5.8
	150	46	5.4	0.5			4.6	6.0
GREEN 1.3 mm	100	61	6.0	0.4			4.2	5.8
	150	76	6.9	0.5			4.6	6.2
	200	88	7.2	0.5			5.0	6.6
RED 1.5 mm	100	85	6.5	0.4			4.4	6.2
	150	105	7.5	0.4			4.8	6.4
	200	120	8.1	0.4			5.0	7.2
ORANGE 1.8 mm	100	95	6.7	0.3				
	150	117	7.5	0.4				
	200	135	8.4	0.5				
GREY 2.0 mm	100	120	6.8	0.4				
	150	150	7.8	0.4				
	200	175	8.0	0.5				
YELLOW max 1.5 mm	100	0 - 82			0 - 6.5	0 - 0.4		
	150	0 - 105			0 - 7.5	0 - 0.4		
	200	0 - 123			0 - 8.1	0 - 0.4		
BLACK max 1.5 mm	100	0 - 82			0 - 6.5	0 - 0.4		
	150	0 - 105			0 - 7.5	0 - 0.4		
	200	0 - 123			0 - 8.1	0 - 0.4		

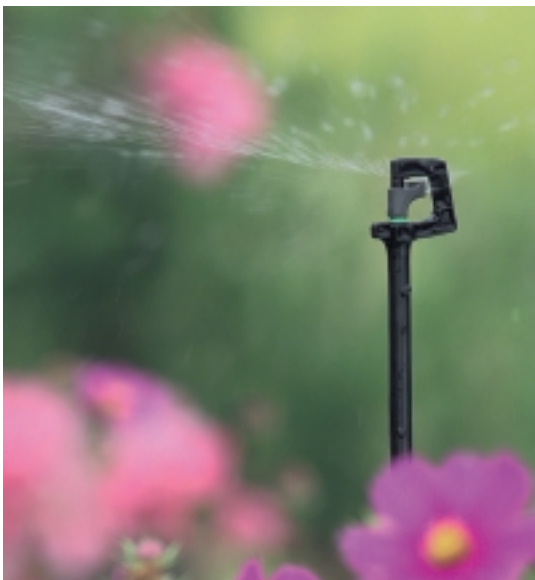

SPECIFICATIONS

DIMENSIONS ASSEMBLED	ROTOR SPRAY™ and INVERTED ROTOR SPRAY™	VARI-ROTOR SPRAY™	UV STABILIZED MATERIAL	BASE/CONNECTION TYPE
HEIGHT	35 mm	45 mm	FRAME acetal	Inlet : 10-32 UNF THREAD 4 mm
WIDTH	27 mm	27 mm	BASE acetal	
WEIGHT (approx)	2.0 g	3.5 g	FLIPPER nylon	