



Flo-Span Expandable Repair Coupling

Flo-Span couplings are produced from PVC type 1 grade 1 material, meeting the requirements of ASTM-D1784. The "O" Rings used in the assembly are of high grade EDPM, an elastometric compound.

Features:


- Double "O" Ring seal giving more protection against possible leakage due to deflection of piston in the extended position or possible contamination of the cylinder wall.
- Solvent cement trap located in the removable cap in order to trap excess solvent glue.
- Located inside the removable cap is an additional "O" Ring for added protection against leakage.
- Removable cap can be unthreaded functioning as a union and inspection for foreign matter obstructing "O" Rings.

*Original style with union available

only in sizes:

2½," 3" and 4".

**FLO-SPAN
EXPANDABLE
REPAIR COUPLING**

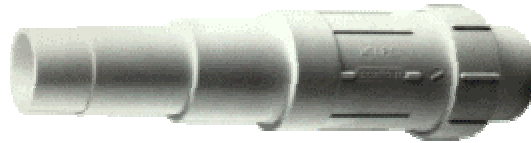

**Expand
your benefits with
Flo Span Couplings**